

PRODUCT SPECIFICATION Extreme Lithium FR03


1. Reference Document

Q/(GZ)PH001-2004: Lithium and iron disulfide battery
 IEC60086-4: 2000 Primary batteries-Part 4: Safety of lithiumbatteries

2. Specification

No.	Item	Specification
1.	Battery system	Lithium and Iron Disulfide Battery (Li/FeS ₂)
2.	type of battery	Primary battery
3.	Nominal Voltage	1.5 V
4.	Rated Capacity	1200 mAh
5.	Working Voltage	1.30V @ 100mA discharge rate
6.	Maximum pulse discharge current	2000mA(2 sec on / 8 sec off)
7.	Maximum continuous discharge current	1500mA
8.	Discharge Cut-off Voltage	0.80V
9.	Volume	3.8cubic centimeters
10.	Weight	Approx. 7.5 g
11.	Lithium Content	Less than 0.5 gram per cell
12.	Dimensions	Diameter: 10.0±0.5 mm Height: 44.0±0.5 mm
13.	Operating Temp.	-40°C to 60°C
14.	Storage/Shipping Temp.	-20°C to 40°C
15.	Storage/Shipping Humidity	≤65 %
16.	Storage life	10 Years

3. Drawing (unit: mm (inches))

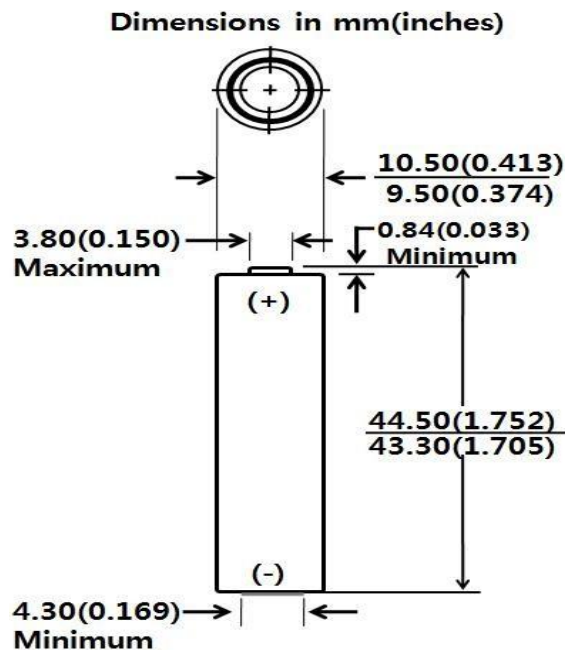

4. Test Conditions and Performance

4.1 Measuring Instrument or Apparatus

4.1.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by calipers with equal or more precision scale of 0.01 mm.

4.1.2 Voltmeter

Standard class specified in the national standard or more sensitive class having inner impedance more than 10 k Ω /V.

4.1.3 Ammeter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01 Ω .

4.2 Standard Test Conditions

Unless other defined, test and measurement shall be done under temperature of 20 \pm 5 $^{\circ}$ C and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature 10~30 $^{\circ}$ C and humidity 25~85%RH.

4.3 Visual inspection

There shall be no such defect as scratch, flaw, crack, and leakage, which may adversely affect commercial value of cell.

4.4 Basic Characteristics

No.	Item	Measuring Procedure	Criteria
1.	Open-Circuit Voltage	The open-circuit voltage shall be measured by voltmeter.	≥ 1.72 V
2.	Dimension	Use calipers test cell's dimensions.	As item 4.9
3.	Discharge Capacity	The capacity means the discharge capacity of the cell, which is measured by continuously discharging with a current of 30 mA to 0.8V.(25 \pm 2 $^{\circ}$ C).	≥ 1150 mAh
4.	External Short Circuit	Positive and negative of fresh battery are connected by a Cu wire. This short-circuit condition is continued for 1 day at room temperature (20 \pm 2 $^{\circ}$ C).	No leakage; No explosion
5.	Forced Discharge	Discharged to 0.8V at 100mA; And then the sample cell is forced discharged with 100mA for 3 hours.	No explosion; No fire

4.5 Mechanical Characteristics


No.	Item	Test Method	Criteria
1.	Impact	A 15.8 mm diameter bar is vertically placed across the centre of the sample cell. A 9.1 kg mass is dropped from a height of 61cm onto the sample.	No explosion, No fire.
2.	Vibration	Freq: 10~55hz; Amp: 2mm; Three directions; total 90 min	No leakage, No explosion, no fire 0.02V total maximum OV changes
3.	Crush	A sample cell is to be crushed between two flat surfaces. Force: 32mm diameter piston; Max pressure: 17.2MPa; Max force: 13KN; Released when the max pressure obtained.	No explosion, No fire

4.6 Environmental test


No.	Item	Test Conditions	Criteria
1.	Thermal test	Fresh batteries, store at 70 deg. C for 4hs; 20 deg. C for 2hs; -20 deg. C for 4hs; 20 deg. C for 2hs. All cycled 5 times	No leakage No explosion; No fire
2.	Heating test	Fresh battery is heated in an oven. The rate of temperature raised: 5 \pm 2 $^{\circ}$ C per minute; Max. temperature 150 \pm 2 $^{\circ}$ C remaining for 10 minutes.	No explosion; No fire
3.	Drop test	Fresh batteries; Height: 1m, 6 times; Each direction two times; Concrete floor	No leakage; No explosion; No fire

5. Performance Testing


Comparison of constant current discharge at different temperatures

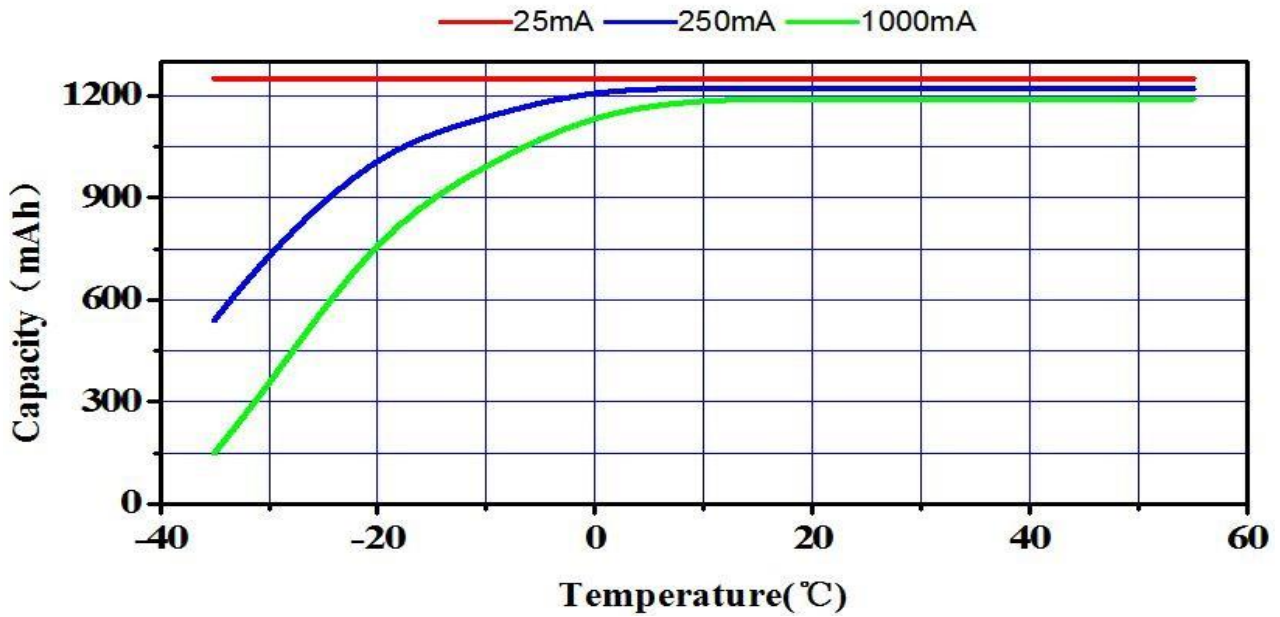

25 °C, different current discharge

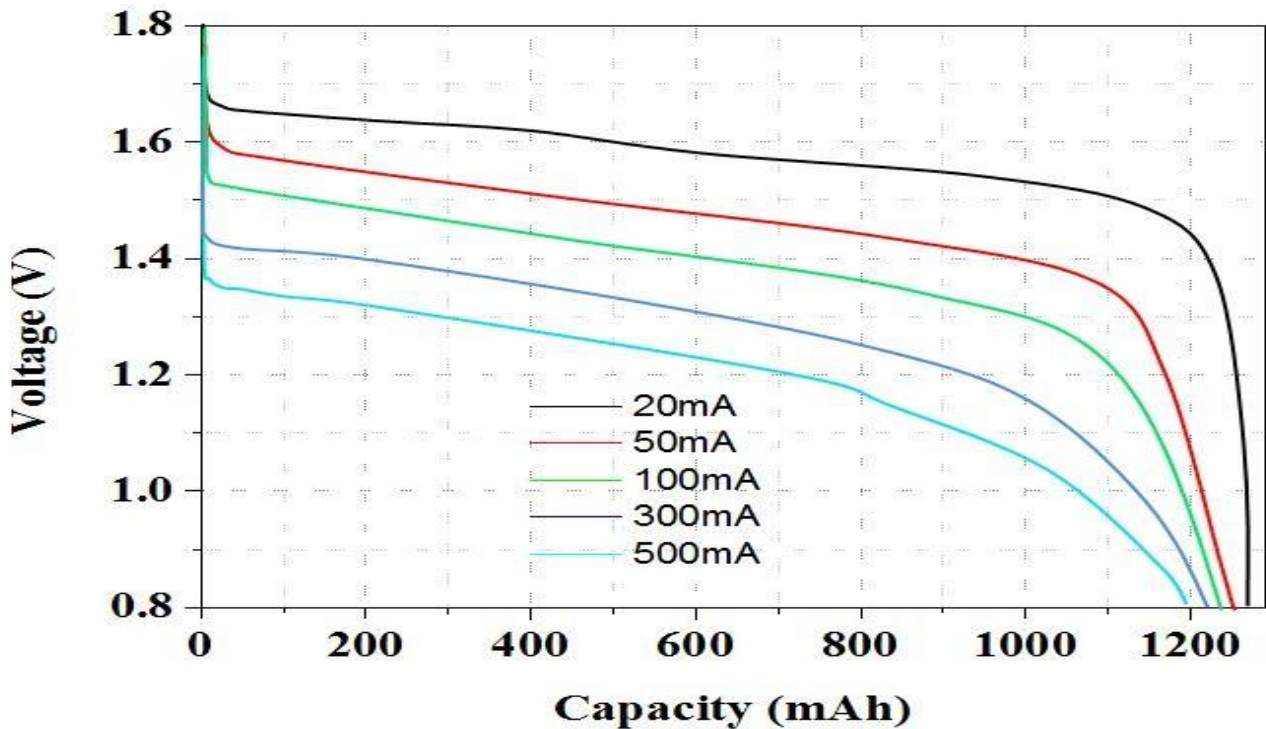


Multi-sample constant-resistance discharge (5.1ohm/4min on, 56minoff)

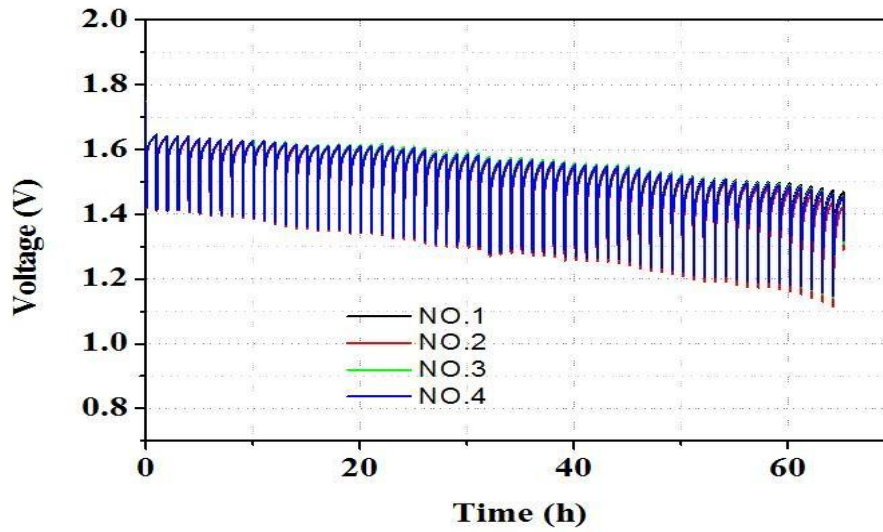


6. Contrast test

Constant current (50mA) discharge at 25°C

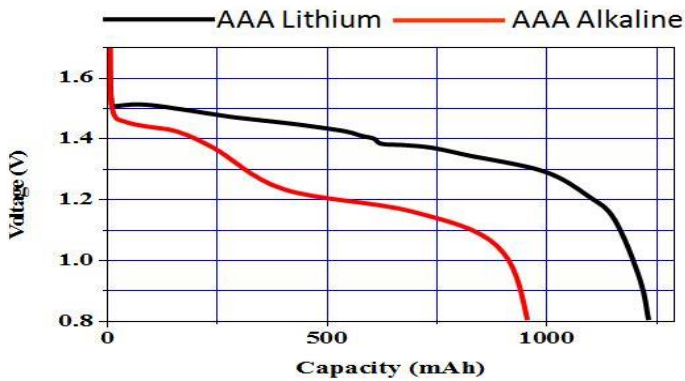

Constant current (50mA) discharge at 25°C

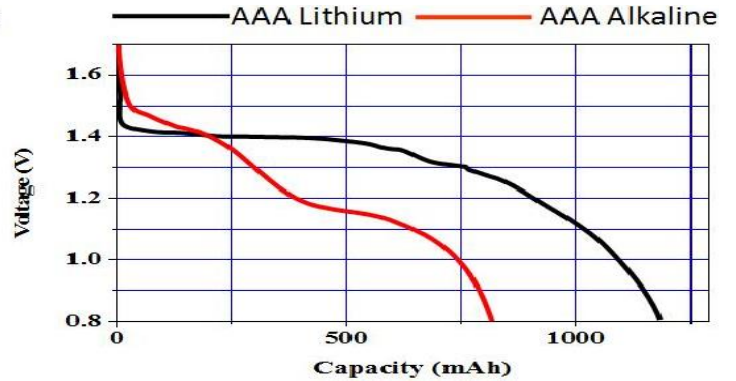

7. Cautions in use

To ensure proper use of the battery please read the manual carefully before using it.

Handling

Do not expose to, dispose of the battery in fire.

Do not put the battery in a charger or equipment with wrong terminals connected.

Avoid shorting the battery

Avoid excessive physical shock or vibration.

Do not disassemble or deform the battery.

Do not immerse in water.

Do not use the battery mixed with used or other different make, type, model batteries.

Keep out of the reach of children.

Storage

Store the battery in a cool, dry and well-ventilated area.

Disposal Regulations vary for different countries.

Dispose of in accordance with local regulations.

8. Battery operation instruction

8.1 Discharging current

The discharging current does not have to surpass this specification book stipulation the biggest discharging current, the over sized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.

8.2 Electric discharge temperature

The battery discharge must carry on in the ambient temperature scope which this specification book stipulated.

8.3 Storing the Batteries

The battery should store in the product specification book stipulation temperature range. If has surpasses above for six months the long time storage, the discharge capacity will decrease sharply

9. Other Chemical Reaction

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as discharge, ambient temperature, are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. Please change the battery in time.

10. Note

Any other items which are not covered in this specification shall be agreed by both parties.